


## COMPATIBLE WITH STANDARD TTL INTEGRATED CIRCUITS

- Gallium Arsenide Diode Infrared Source Optically Coupled to a Silicon npn Phototransistor
- High Direct-Current Transfer Ratio
- Base Lead Provided for Conventional Transistor Biasing
- High-Voltage Electrical Isolation . . . 1.5-kV, or 3.55-kV Rating
- Plastic Dual-In-Line Package
- High-Speed Switching:  
 $t_r = 5 \mu s$ ,  $t_f = 5 \mu s$  Typical
- Designed to be Interchangeable with General Instruments MCT2 and MCT2E

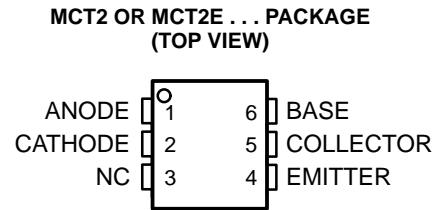

NC – No internal connection

### absolute maximum ratings at 25°C free-air temperature (unless otherwise noted)†

Input-to-output voltage: MCT2	± 1.5 kV
MCT2E	± 3.55 kV
Collector-base voltage	70 V
Collector-emitter voltage (see Note 1)	30 V
Emitter-collector voltage	7 V
Emitter-base voltage	7 V
Input-diode reverse voltage	3 V
Input-diode continuous forward current	60 mA
Input-diode peak forward current ( $t_w \leq 1 \text{ ns}$ , PRF $\leq 300 \text{ Hz}$ )	3 A
Continuous power dissipation at (or below) 25°C free-air temperature:	
Infrared-emitting diode (see Note 2)	200 mW
Phototransistor (see Note 2)	200 mW
Total, infrared-emitting diode plus phototransistor (see Note 3)	250 mW
Operating free-air temperature range, $T_A$	-55°C to 100°C
Storage temperature range, $T_{stg}$	-55°C to 150°C
Lead temperature 1,6 mm (1/16 inch) from case for 10 seconds	260°C

† Stresses beyond those listed under “absolute maximum ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under “recommended operating conditions” is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

- NOTES:
1. This value applies when the base-emitter diode is open-circuited.
  2. Derate linearly to 100 °C free-air temperature at the rate of 2.67 mW/°C.
  3. Derate linearly to 100 °C free-air temperature at the rate of 3.33 mW/°C.

# MCT2, MCT2E OPTOCOUPERS

SOES023 – MARCH 1983 – REVISED OCTOBER 1995

## electrical characteristics at 25°C free-air temperature (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT	
$V_{(BR)CBO}$	Collector-base breakdown voltage	$I_C = 10 \mu A, I_E = 0, I_F = 0$	70			V	
$V_{(BR)CEO}$	Collector-emitter breakdown voltage	$I_C = 1 mA, I_B = 0, I_F = 0$	30			V	
$V_{(BRECO)}$	Emitter-collector breakdown voltage	$I_E = 100 \mu A, I_B = 0, I_F = 0$	7			V	
$I_R$	Input diode static reverse current	$V_R = 3 V$			10	$\mu A$	
$I_{C(on)}$	On-state collector current	Phototransistor operation	$V_{CE} = 10 V, I_B = 0, I_F = 10 mA$	2	5	mA	
		Photodiode operation	$V_{CB} = 10 V, I_E = 0, I_F = 10 mA$		20	$\mu A$	
$I_{C(off)}$	Off-state collector current	Phototransistor operation	$V_{CE} = 10 V, I_B = 0, I_F = 0$		1	50	nA
		Photodiode operation	$V_{CB} = 10 V, I_E = 0, I_F = 0$		0.1	20	nA
$H_{FE}$	Transistor static forward current transfer ratio	$V_{CE} = 5 V, I_C = 100 \mu A, I_F = 0$	MCT2		250		
			MCT2E	100	300		
$V_F$	Input diode static forward voltage	$I_F = 20 mA$		1.25	1.5	V	
$V_{CE(sat)}$	Collector-emitter saturation voltage	$I_C = 2 mA, I_B = 0, I_F = 16 mA$		0.25	4	V	
$r_{IO}$	Input-to-output internal resistance	$V_{in-out} = \pm 1.5 kV$ for MCT2, $\pm 3.55 kV$ for MCT2E, See Note 4	10 <sup>11</sup>			$\Omega$	
$C_{io}$	Input-to-output capacitance	$V_{in-out} = 0, f = 1 MHz,$ See Note 4		1		pF	


NOTE 4: These parameters are measured between both input diode leads shorted together and all the phototransistor leads shorted together.

## switching characteristics


PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
$t_r$	Rise time	$V_{CC} = 10 V, I_{C(on)} = 2 mA,$ $R_L = 100 \Omega,$ See Test Circuit A of Figure 1		5		$\mu s$
$t_f$	Fall time					
$t_r$	Rise time	$V_{CC} = 10 V, I_{C(on)} = 20 \mu A,$ $R_L = 1 k\Omega,$ See Test Circuit B of Figure 1		1		$\mu s$
$t_f$	Fall time					




PARAMETER MEASUREMENT INFORMATION

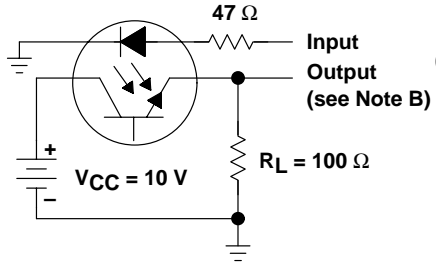

TEST CIRCUIT A  
PHOTOTRANSISTOR OPERATION

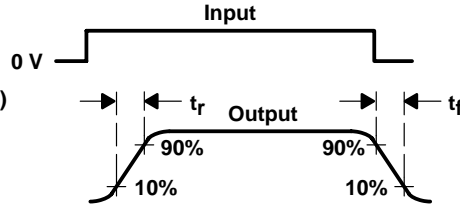

VOLTAGE WAVEFORMS

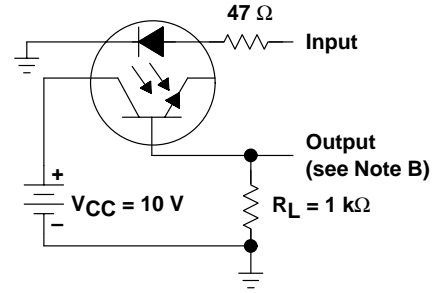

TEST CIRCUIT B  
PHOTODIODE OPERATION

- NOTES: A. The input waveform is supplied by a generator with the following characteristics:  $Z_O = 50 \Omega$ ,  $t_r \leq 15 \text{ ns}$ , duty cycle  $\approx 1\%$ ,  $t_w = 100 \mu\text{s}$ .  
B. The output waveform is monitored on an oscilloscope with the following characteristics:  $t_r \leq 12 \text{ ns}$ ,  $R_{in} \geq 1 \text{ M}\Omega$ ,  $C_{in} \leq 20 \text{ pF}$ .

Figure 1. Switching Times

TYPICAL CHARACTERISTICS



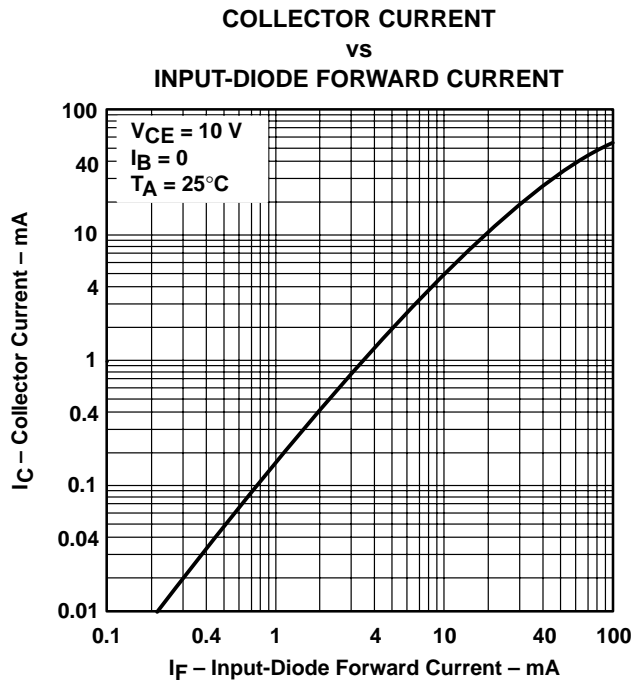


Figure 2

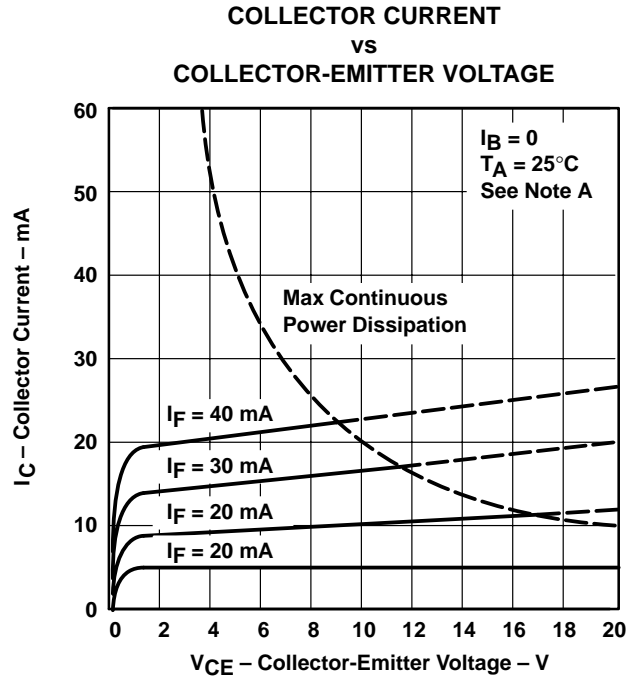

NOTE A: Pulse operation of input diode is required for operation beyond limits shown by dotted lines.

Figure 3

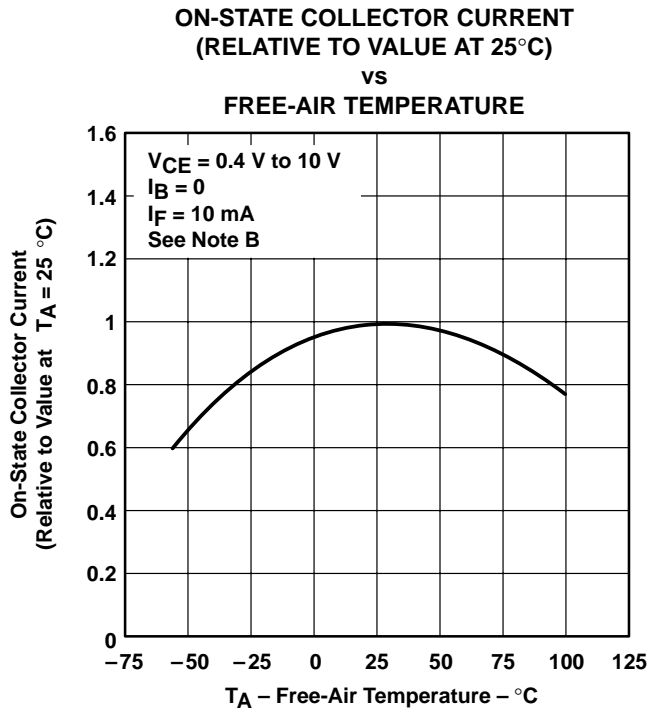


NOTE B: These parameters were measured using pulse techniques,  $t_w = 1$  ms, duty cycle  $\leq 2\%$ .

Figure 4

MECHANICAL INFORMATION

The package consists of a gallium-arsenide infrared-emitting diode and an npn silicon phototransistor mounted on a 6-lead frame encapsulated within an electrically nonconductive plastic compound. The case can withstand soldering temperature with no deformation and device performance characteristics remain stable when operated in high-humidity conditions. Unit weight is approximately 0.52 grams.

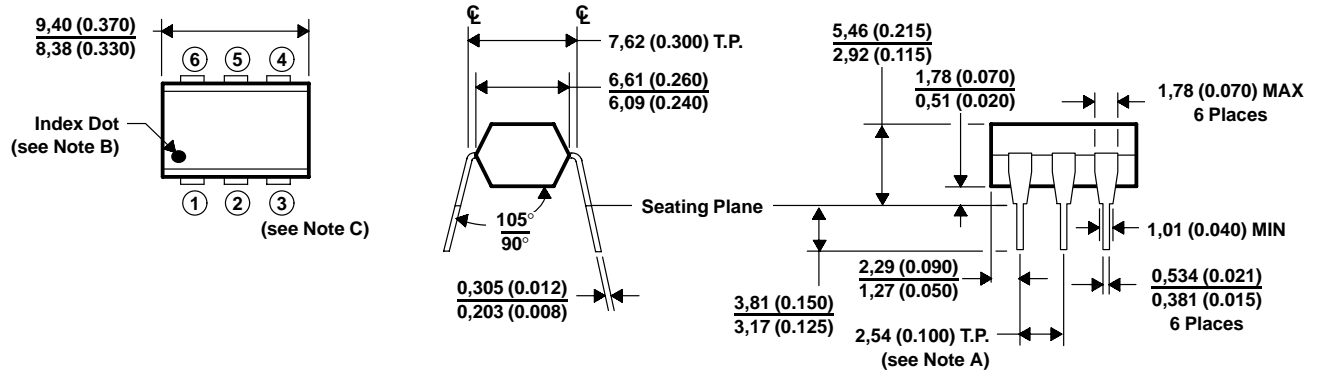

- NOTES: A. Leads are within 0,13 (0.005) radius of true position (T.P.) with maximum material condition and unit installed.  
 B. Pin 1 identified by index dot.  
 C. Terminal connections:  
 1. Anode (part of the infrared-emitting diode)  
 2. Cathode (part of the infrared-emitting diode)  
 3. No internal connection  
 4. Emitter (part of the phototransistor)  
 5. Collector (part of the phototransistor)  
 6. Base (part of the phototransistor)  
 D. The dimensions given fall within JEDEC MO-001 AM dimensions.  
 E. All linear dimensions are given in millimeters and parenthetically given in inches.

Figure 5. Mechanical Information

## IMPORTANT NOTICE

Texas Instruments and its subsidiaries (TI) reserve the right to make changes to their products or to discontinue any product or service without notice, and advise customers to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete. All products are sold subject to the terms and conditions of sale supplied at the time of order acknowledgment, including those pertaining to warranty, patent infringement, and limitation of liability.

TI warrants performance of its products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

Customers are responsible for their applications using TI components.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards must be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance or customer product design. TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such products or services might be or are used. TI's publication of information regarding any third party's products or services does not constitute TI's approval, license, warranty or endorsement thereof.

Reproduction of information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations and notices. Representation or reproduction of this information with alteration voids all warranties provided for an associated TI product or service, is an unfair and deceptive business practice, and TI is not responsible nor liable for any such use.

Resale of TI's products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service, is an unfair and deceptive business practice, and TI is not responsible nor liable for any such use.

Also see: [Standard Terms and Conditions of Sale for Semiconductor Products](http://www.ti.com/sc/docs/stdterms.htm). [www.ti.com/sc/docs/stdterms.htm](http://www.ti.com/sc/docs/stdterms.htm)

### Mailing Address:

Texas Instruments  
Post Office Box 655303  
Dallas, Texas 75265

This datasheet has been downloaded from:

[www.DatasheetCatalog.com](http://www.DatasheetCatalog.com)

Datasheets for electronic components.